



DUCHESNE COUNTY MONUMENT SURVEY RECORD

T2S
R2W R1W
1/4
SEC 24 | SEC 19
U.S.B.&M.


L-1



SCALE: 1"=30'



LINE	BEARING	DISTANCE
L1	N 24°08'18" W	68.03'
L2	S 89°39'02" W	29.03'
L3	S 85°13'52" E	27.77'
L4	S 35°59'08" E	47.34'
L5	S 37°19'56" W	48.23'

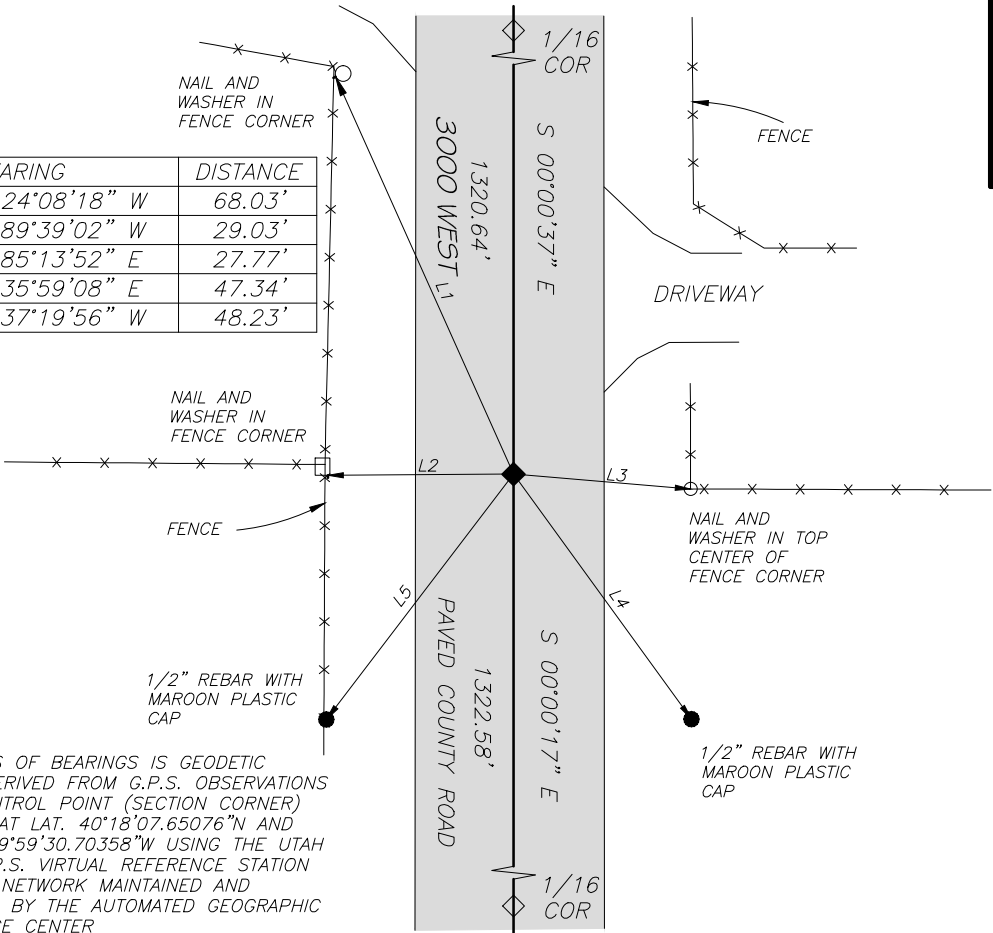

NOTE:
THE BASIS OF BEARINGS IS GEODETIC
NORTH DERIVED FROM G.P.S. OBSERVATIONS
AT A CONTROL POINT (SECTION CORNER)
LOCATED AT LAT. 40°18'07.65076"N AND
LONG. 109°59'30.70358"W USING THE UTAH
STATE G.P.S. VIRTUAL REFERENCE STATION
CONTROL NETWORK MAINTAINED AND
OPERATED BY THE AUTOMATED GEOGRAPHIC
REFERENCE CENTER

DESCRIPTION OF CORNER EVIDENCE FOUND

FOUND A 2½" DUCHESNE COUNTY
BRASS MONUMENT WITH CONCRETE
COLLAR AT POSITION OF 1/4 CORNER
IN THE COUNTY ROAD



MARKINGS ON MONUMENT

DESCRIPTION OF MONUMENT AND ACCESSORIES
ESTABLISHED TO PERPETUATE THE ORIGINAL
LOCATION OF THE CORNER

USED REFERENCE REBAR, NAIL AND
WASHER, AND ADJOINING CORNERS AS
REFERENCE POINTS AS SHOWN

STATE PLANE COORDINATE DATA

(U.S. SURVEY FEET)
NAD83 UTAH CENTRAL ZONE
N: 7279415.537
E: 2045282.904
NAVD88 EL: 5133.74'



PHOTO OF MONUMENT FACING NORTH

LATITUDE: 40°17'41.49211" N
LONGITUDE: 110°02'54.47225" W
ELLIPSOID HEIGHT: 5076.84'
(GEOID 03 CONUS)
PUBLIC LAND SURVEY SYSTEM GCDB ID NO.
UT300020S0010W0_100340

CERTIFICATION

I Jerry D. Allred, Professional Land Surveyor, State of Utah, do
hereby certify that I have performed or reviewed the work done on the
diagrammed corner as reported on this recordation form and approve same

Date 11 DEC '17

Jerry D. Allred, Professional Land Surveyor
Certificate No. 148951
Duchesne County Surveyor

